PRODUCT SPECIFICATION

Work for	mobile phone and digital product
Input voltage	DC 5V
Input current	800mA(MAX)
Output voltage	DC 5V~5.5V
Output current	2.2A(MAX)
Capacity	9000mAh(MAX)
Product weight	299g
Product dimension	96(L)×41(W)×41(H)mm
Operating temperate	-10℃~60℃
Storage temperate	-10℃~45℃

MAINTENANCE

Keep your FTB9000LED operating to the fullest potential, by following the below steps:

1. Re-charge your FTB9000LED once every three months when it is not in use.
2. Keep the FTB9000LED away from any moist environment and corrosive material.
3. Never wash the FTB9000LED with any chemicals, soaps or detergents.

iconBIT

FTB9000 LED

Rechargeable Battery Pack

USER MANUAL

www.iconbit.com

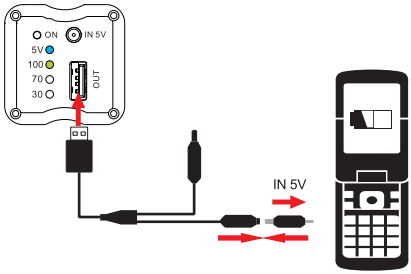

HOW TO USE

- Simply using the attached USB cable to charge the digital product. One end of the USB cable connect with the “OUT” port of the charger, another end connect with the digital product with converted tip. Press “ON” bottom once, it will start to charge and the green LED will indicate the charging process.
- Finishing charging or without connecting the digital product, the green and blue LED will stop flashing. And the charger will turn off automatically after 30 seconds.
- 30%, 70%, 100% is the three capacity indicators.
- When the capacity indicator at 30% means low power and it need to charge the charger in time.

Note: If the instantaneous current is oversize when charging the digital product, the charger will turn to protected mode automatically. To relieve the protected mode just charge the charger.

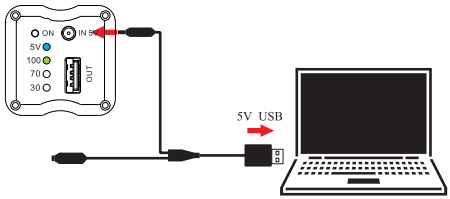

HOW TO CHARGE THE POWER BANK

- The “IN 5V” port is the charging port the charger. The green LED will light on and the green LED will flash when charge the charger, all the blue and green LED will light on after full charging.

UNIT VIEW DESCRIPTION



1. Turn ON button
2. DC5V input port
3. DC5V LED indicator
4. USB output port
5. Power indicator